
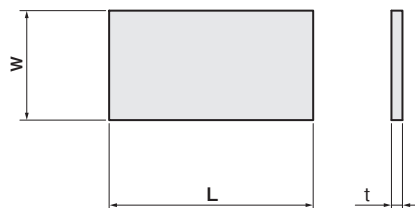


## シムプレート

当日出荷  
受付16時

RoHS  
10物質

様々なサイズにカットしたシムプレートを標準化しました。



単位：mm

寸法公差表

| L, W    | 公差   |
|---------|------|
| 50~100  | ±0.3 |
| 101~300 | ±0.5 |

■材料スペック表(材質・板厚・板厚公差)

| 材質                                                     | 板厚(mm) | t 0.05 | t 0.1  | t 0.15 | t 0.2 | t 0.25 | t 0.3  | t 0.35 | t 0.4  | t 0.5  | t 0.6  | t 0.7 | t 0.8 | t 1.0  |
|--------------------------------------------------------|--------|--------|--------|--------|-------|--------|--------|--------|--------|--------|--------|-------|-------|--------|
| 鉄 (SPCC相当)                                             |        | —      | ±0.03  | ±0.03  | ±0.03 | ±0.04  | ±0.04  | —      | ±0.05  | ±0.05  | ±0.06  | —     | ±0.06 | ±0.08  |
| 焼入鋼 (t 0.1~0.15: SK95, t 0.2~2.0: SK85)<br>※硬度HRC42~46 |        | —      | ±0.015 | ±0.015 | ±0.02 | ±0.025 | ±0.025 | ±0.025 | ±0.035 | ±0.035 | ±0.04  | ±0.04 | ±0.04 | ±0.05  |
| ステンレス (SUS304)                                         |        | ±0.005 | ±0.008 | ±0.008 | ±0.01 | ±0.015 | ±0.015 | ±0.015 | ±0.02  | ±0.02  | ±0.025 | ±0.03 | ±0.03 | ±0.035 |
| 真鍮 (t 0.05~0.15: C2680, t 0.2~1.0: C2801)              |        | ±0.005 | ±0.02  | ±0.02  | ±0.02 | ±0.02  | ±0.03  | —      | ±0.04  | ±0.04  | ±0.04  | ±0.04 | ±0.04 | ±0.05  |
| 銅 (t 0.1: C1020, t 0.15~1.0: C1100)                    |        | —      | ±0.02  | ±0.02  | ±0.02 | ±0.02  | ±0.03  | —      | ±0.04  | ±0.04  | ±0.04  | ±0.04 | ±0.04 | ±0.05  |
| アルミ (t 0.1~0.15: 1N30, t 0.2~3.0: A1050)               |        | —      | ±0.03  | ±0.03  | ±0.03 | —      | ±0.04  | —      | ±0.04  | ±0.04  | ±0.04  | —     | ±0.05 | ±0.05  |

注文例

材質：鉄、幅：50、長さ：100、板厚：0.1の場合

T F 50-100-01

| W   | L           | 板厚<br>t     | 1枚単位                             |       |         |           |        |       |         |
|-----|-------------|-------------|----------------------------------|-------|---------|-----------|--------|-------|---------|
|     |             |             | 品番                               | 価格(円) |         |           |        |       |         |
|     |             |             | 鉄 F、焼入鋼 Y、ステンレス S、真鍮 B、銅 C、アルミ A | 鉄 T F | 焼入鋼 T Y | ステンレス T S | 真鍮 T B | 銅 T C | アルミ T A |
| 50  | 50          | 0.05        | T 50-50-005                      | —     | —       | 260       | 260    | —     | —       |
|     |             | 0.1         | T 50-50-01                       | 240   | 300     | 260       | 260    | 300   | 250     |
|     |             | 0.15        | T 50-50-015                      | 240   | 300     | 260       | 260    | 300   | 250     |
|     |             | 0.2         | T 50-50-02                       | 240   | 300     | 260       | 260    | 300   | 250     |
|     |             | 0.25        | T 50-50-025                      | 240   | 300     | 260       | 260    | 300   | —       |
|     |             | 0.3         | T 50-50-03                       | 240   | 300     | 260       | 260    | 300   | 250     |
|     |             | 0.35        | T 50-50-035                      | —     | 300     | 260       | —      | —     | —       |
|     |             | 0.4         | T 50-50-04                       | 250   | 320     | 270       | 270    | 320   | 260     |
|     |             | 0.5         | T 50-50-05                       | 250   | 320     | 270       | 270    | 320   | 260     |
|     |             | 0.6         | T 50-50-06                       | 260   | 360     | 290       | 300    | 360   | 270     |
|     |             | 0.7         | T 50-50-07                       | —     | 360     | 290       | 300    | 360   | —       |
|     | 0.8         | T 50-50-08  | 260                              | 360   | 290     | 300       | 360    | 270   |         |
|     | 1.0         | T 50-50-10  | 260                              | 360   | 290     | 300       | 360    | 270   |         |
|     | 100         | 0.05        | T 50-100-005                     | —     | —       | 350       | 350    | —     | —       |
|     |             | 0.1         | T 50-100-01                      | 300   | 410     | 350       | 350    | 390   | 320     |
|     |             | 0.15        | T 50-100-015                     | 300   | 410     | 350       | 350    | 390   | 320     |
|     |             | 0.2         | T 50-100-02                      | 300   | 410     | 350       | 350    | 390   | 320     |
|     |             | 0.25        | T 50-100-025                     | 300   | 410     | 350       | 350    | 390   | —       |
|     |             | 0.3         | T 50-100-03                      | 300   | 410     | 350       | 350    | 390   | 320     |
|     |             | 0.35        | T 50-100-035                     | —     | 410     | 350       | —      | —     | —       |
|     |             | 0.4         | T 50-100-04                      | 320   | 440     | 360       | 360    | 420   | 340     |
|     |             | 0.5         | T 50-100-05                      | 320   | 440     | 360       | 360    | 420   | 340     |
| 0.6 |             | T 50-100-06 | 350                              | 480   | 390     | 400       | 480    | 360   |         |
| 0.7 |             | T 50-100-07 | —                                | 480   | 390     | 400       | 480    | —     |         |
| 0.8 | T 50-100-08 | 350         | 480                              | 390   | 400     | 480       | 360    |       |         |
| 1.0 | T 50-100-10 | 350         | 480                              | 390   | 400     | 480       | 360    |       |         |

セミオーダー

オプション

▶ P.210

マーキング  
▶ P.219

黒染め  
▶ P.220

仮止め用粘着剤付  
▶ P.220

| W  | L   | 板厚<br>t | 1枚単位                                             |         |           |             |          |         |           |
|----|-----|---------|--------------------------------------------------|---------|-----------|-------------|----------|---------|-----------|
|    |     |         | 品番                                               | 価格(円)   |           |             |          |         |           |
|    |     |         | □:材質記号<br>鉄[F] 焼入鋼[Y] ステンレス[S] 真鍮[B] 銅[C] アルミ[A] | 鉄 T [F] | 焼入鋼 T [Y] | ステンレス T [S] | 真鍮 T [B] | 銅 T [C] | アルミ T [A] |
| 50 | 150 | 0.05    | T□50-150-005                                     | —       | —         | 410         | 420      | —       | —         |
|    |     | 0.1     | T□50-150-01                                      | 380     | 530       | 410         | 420      | 480     | 390       |
|    |     | 0.15    | T□50-150-015                                     | 380     | 530       | 410         | 420      | 480     | 390       |
|    |     | 0.2     | T□50-150-02                                      | 380     | 530       | 410         | 420      | 480     | 390       |
|    |     | 0.25    | T□50-150-025                                     | 380     | 530       | 410         | 420      | 480     | —         |
|    |     | 0.3     | T□50-150-03                                      | 380     | 530       | 410         | 420      | 480     | 390       |
|    |     | 0.35    | T□50-150-035                                     | —       | 530       | 410         | —        | —       | —         |
|    |     | 0.4     | T□50-150-04                                      | 400     | 580       | 450         | 470      | 530     | 410       |
|    |     | 0.5     | T□50-150-05                                      | 400     | 580       | 450         | 470      | 530     | 410       |
|    |     | 0.6     | T□50-150-06                                      | 430     | 700       | 540         | 550      | 630     | 450       |
|    | 200 | 0.7     | T□50-150-07                                      | —       | 700       | 540         | 550      | 630     | —         |
|    |     | 0.8     | T□50-150-08                                      | 430     | 700       | 540         | 550      | 630     | 450       |
|    |     | 1.0     | T□50-150-10                                      | 430     | 700       | 540         | 550      | 630     | 450       |
|    |     | 0.05    | T□50-200-005                                     | —       | —         | 480         | 490      | —       | —         |
|    |     | 0.1     | T□50-200-01                                      | 430     | 760       | 480         | 490      | 550     | 440       |
|    |     | 0.15    | T□50-200-015                                     | 430     | 760       | 480         | 490      | 550     | 440       |
|    |     | 0.2     | T□50-200-02                                      | 430     | 760       | 480         | 490      | 550     | 440       |
|    |     | 0.25    | T□50-200-025                                     | 430     | 760       | 480         | 490      | 550     | —         |
|    |     | 0.3     | T□50-200-03                                      | 430     | 760       | 480         | 490      | 550     | 440       |
|    |     | 0.35    | T□50-200-035                                     | —       | 760       | 480         | —        | —       | —         |
|    | 250 | 0.4     | T□50-200-04                                      | 450     | 820       | 540         | 550      | 630     | 480       |
|    |     | 0.5     | T□50-200-05                                      | 450     | 820       | 540         | 550      | 630     | 480       |
|    |     | 0.6     | T□50-200-06                                      | 490     | 940       | 610         | 640      | 750     | 520       |
|    |     | 0.7     | T□50-200-07                                      | —       | 940       | 610         | 640      | 750     | —         |
|    |     | 0.8     | T□50-200-08                                      | 490     | 940       | 610         | 640      | 750     | 520       |
|    |     | 1.0     | T□50-200-10                                      | 490     | 940       | 610         | 640      | 750     | 520       |
|    |     | 0.05    | T□50-250-005                                     | —       | —         | 540         | 550      | —       | —         |
|    |     | 0.1     | T□50-250-01                                      | 490     | 990       | 540         | 550      | 630     | 500       |
|    |     | 0.15    | T□50-250-015                                     | 490     | 990       | 540         | 550      | 630     | 500       |
|    |     | 0.2     | T□50-250-02                                      | 490     | 990       | 540         | 550      | 630     | 500       |
|    | 300 | 0.25    | T□50-250-025                                     | 490     | 990       | 540         | 550      | 630     | —         |
|    |     | 0.3     | T□50-250-03                                      | 490     | 990       | 540         | 550      | 630     | 500       |
|    |     | 0.35    | T□50-250-035                                     | —       | 990       | 540         | —        | —       | —         |
|    |     | 0.4     | T□50-250-04                                      | 510     | 1,050     | 590         | 600      | 690     | 530       |
|    |     | 0.5     | T□50-250-05                                      | 510     | 1,050     | 590         | 600      | 690     | 530       |
|    |     | 0.6     | T□50-250-06                                      | 550     | 1,160     | 740         | 750      | 870     | 590       |
|    |     | 0.7     | T□50-250-07                                      | —       | 1,160     | 740         | 750      | 870     | —         |
|    |     | 0.8     | T□50-250-08                                      | 550     | 1,160     | 740         | 750      | 870     | 590       |
|    |     | 1.0     | T□50-250-10                                      | 550     | 1,160     | 740         | 750      | 870     | 590       |
|    |     | 0.05    | T□50-300-005                                     | —       | —         | 600         | 600      | —       | —         |
|    | 300 | 0.1     | T□50-300-01                                      | 520     | 1,050     | 600         | 600      | 690     | 530       |
|    |     | 0.15    | T□50-300-015                                     | 520     | 1,050     | 600         | 600      | 690     | 530       |
|    |     | 0.2     | T□50-300-02                                      | 520     | 1,050     | 600         | 600      | 690     | 530       |
|    |     | 0.25    | T□50-300-025                                     | 520     | 1,050     | 600         | 600      | 690     | —         |
|    |     | 0.3     | T□50-300-03                                      | 520     | 1,050     | 600         | 600      | 690     | 530       |
|    |     | 0.35    | T□50-300-035                                     | —       | 1,050     | 600         | —        | —       | —         |
|    |     | 0.4     | T□50-300-04                                      | 550     | 1,110     | 720         | 730      | 820     | 580       |
|    |     | 0.5     | T□50-300-05                                      | 550     | 1,110     | 720         | 730      | 820     | 580       |
|    |     | 0.6     | T□50-300-06                                      | 590     | 1,220     | 840         | 850      | 1,020   | 640       |
|    |     | 0.7     | T□50-300-07                                      | —       | 1,220     | 840         | 850      | 1,020   | —         |
|    |     | 0.8     | T□50-300-08                                      | 590     | 1,220     | 840         | 850      | 1,020   | 640       |
|    |     | 1.0     | T□50-300-10                                      | 590     | 1,220     | 840         | 850      | 1,020   | 640       |

| W   | L   | 板厚<br>t | 1枚単位                                                                                                                                             |       |         |           |        |       |         |
|-----|-----|---------|--------------------------------------------------------------------------------------------------------------------------------------------------|-------|---------|-----------|--------|-------|---------|
|     |     |         | 品番                                                                                                                                               | 価格(円) |         |           |        |       |         |
|     |     |         | <div> <div>□ : 材質記号</div> <div> <div>鉄 F</div> <div>焼入鋼 Y</div> <div>ステンレス S</div> <div>真鍮 B</div> <div>銅 C</div> <div>アルミ A</div> </div> </div> | 鉄 T F | 焼入鋼 T Y | ステンレス T S | 真鍮 T B | 銅 T C | アルミ T A |
| 100 | 100 | 0.05    | T□100-100-005                                                                                                                                    | —     | —       | 480       | 490    | —     | —       |
|     |     | 0.1     | T□100-100-01                                                                                                                                     | 430   | 760     | 480       | 490    | 550   | 440     |
|     |     | 0.15    | T□100-100-015                                                                                                                                    | 430   | 760     | 480       | 490    | 550   | 440     |
|     |     | 0.2     | T□100-100-02                                                                                                                                     | 430   | 760     | 480       | 490    | 550   | 440     |
|     |     | 0.25    | T□100-100-025                                                                                                                                    | 430   | 760     | 480       | 490    | 550   | —       |
|     |     | 0.3     | T□100-100-03                                                                                                                                     | 430   | 760     | 480       | 490    | 550   | 440     |
|     |     | 0.35    | T□100-100-035                                                                                                                                    | —     | —       | 480       | —      | —     | —       |
|     |     | 0.4     | T□100-100-04                                                                                                                                     | 450   | 820     | 540       | 550    | 630   | 480     |
|     |     | 0.5     | T□100-100-05                                                                                                                                     | 450   | 820     | 540       | 550    | 630   | 480     |
|     |     | 0.6     | T□100-100-06                                                                                                                                     | 490   | 940     | 610       | 640    | 750   | 520     |
|     |     | 0.7     | T□100-100-07                                                                                                                                     | —     | —       | 610       | 640    | 750   | —       |
|     |     | 0.8     | T□100-100-08                                                                                                                                     | 490   | 940     | 610       | 640    | 750   | 520     |
|     |     | 1.0     | T□100-100-10                                                                                                                                     | 490   | 940     | 610       | 640    | 750   | 520     |
|     | 150 | 0.05    | T□100-150-005                                                                                                                                    | —     | —       | 600       | 600    | —     | —       |
|     |     | 0.1     | T□100-150-01                                                                                                                                     | 510   | 1,050   | 600       | 600    | 690   | 530     |
|     |     | 0.15    | T□100-150-015                                                                                                                                    | 510   | 1,050   | 600       | 600    | 690   | 530     |
|     |     | 0.2     | T□100-150-02                                                                                                                                     | 510   | 1,050   | 600       | 600    | 690   | 530     |
|     |     | 0.25    | T□100-150-025                                                                                                                                    | 510   | 1,050   | 600       | 600    | 690   | —       |
|     |     | 0.3     | T□100-150-03                                                                                                                                     | 510   | 1,050   | 600       | 600    | 690   | 530     |
|     |     | 0.35    | T□100-150-035                                                                                                                                    | —     | —       | 600       | —      | —     | —       |
|     |     | 0.4     | T□100-150-04                                                                                                                                     | 550   | 1,110   | 720       | 730    | 820   | 580     |
|     |     | 0.5     | T□100-150-05                                                                                                                                     | 550   | 1,110   | 720       | 730    | 820   | 580     |
|     |     | 0.6     | T□100-150-06                                                                                                                                     | 590   | 1,220   | 840       | 850    | 1,020 | 640     |
|     |     | 0.7     | T□100-150-07                                                                                                                                     | —     | —       | 840       | 850    | 1,020 | —       |
|     |     | 0.8     | T□100-150-08                                                                                                                                     | 590   | 1,220   | 840       | 850    | 1,020 | 640     |
|     |     | 1.0     | T□100-150-10                                                                                                                                     | 590   | 1,220   | 840       | 850    | 1,020 | 640     |
|     | 200 | 0.05    | T□100-200-005                                                                                                                                    | —     | —       | 660       | 670    | —     | —       |
|     |     | 0.1     | T□100-200-01                                                                                                                                     | 550   | 1,120   | 660       | 670    | 750   | 560     |
|     |     | 0.15    | T□100-200-015                                                                                                                                    | 550   | 1,120   | 660       | 670    | 750   | 560     |
|     |     | 0.2     | T□100-200-02                                                                                                                                     | 550   | 1,120   | 660       | 670    | 750   | 560     |
|     |     | 0.25    | T□100-200-025                                                                                                                                    | 550   | 1,120   | 660       | 670    | 750   | —       |
|     |     | 0.3     | T□100-200-03                                                                                                                                     | 550   | 1,120   | 660       | 670    | 750   | 560     |
|     |     | 0.35    | T□100-200-035                                                                                                                                    | —     | —       | 660       | —      | —     | —       |
|     |     | 0.4     | T□100-200-04                                                                                                                                     | 570   | 1,160   | 780       | 790    | 940   | 610     |
|     |     | 0.5     | T□100-200-05                                                                                                                                     | 570   | 1,160   | 780       | 790    | 940   | 610     |
|     |     | 0.6     | T□100-200-06                                                                                                                                     | 630   | 1,290   | 970       | 970    | 1,180 | 680     |
|     |     | 0.7     | T□100-200-07                                                                                                                                     | —     | —       | 970       | 970    | 1,180 | —       |
|     |     | 0.8     | T□100-200-08                                                                                                                                     | 630   | 1,290   | 970       | 970    | 1,180 | 680     |
|     |     | 1.0     | T□100-200-10                                                                                                                                     | 630   | 1,290   | 970       | 970    | 1,180 | 680     |
|     | 250 | 0.05    | T□100-250-005                                                                                                                                    | —     | —       | 720       | 730    | —     | —       |
|     |     | 0.1     | T□100-250-01                                                                                                                                     | 590   | 1,290   | 720       | 730    | 820   | 630     |
|     |     | 0.15    | T□100-250-015                                                                                                                                    | 590   | 1,290   | 720       | 730    | 820   | 630     |
|     |     | 0.2     | T□100-250-02                                                                                                                                     | 590   | 1,290   | 720       | 730    | 820   | 630     |
|     |     | 0.25    | T□100-250-025                                                                                                                                    | 590   | 1,290   | 720       | 730    | 820   | —       |
|     |     | 0.3     | T□100-250-03                                                                                                                                     | 590   | 1,290   | 720       | 730    | 820   | 630     |
|     |     | 0.35    | T□100-250-035                                                                                                                                    | —     | —       | 720       | —      | —     | —       |
|     |     | 0.4     | T□100-250-04                                                                                                                                     | 630   | 1,340   | 880       | 900    | 1,070 | 680     |
|     |     | 0.5     | T□100-250-05                                                                                                                                     | 630   | 1,340   | 880       | 900    | 1,070 | 680     |
|     |     | 0.6     | T□100-250-06                                                                                                                                     | 710   | 1,520   | 1,190     | 1,200  | 1,400 | 760     |
|     |     | 0.7     | T□100-250-07                                                                                                                                     | —     | —       | 1,190     | 1,200  | 1,400 | —       |
|     |     | 0.8     | T□100-250-08                                                                                                                                     | 710   | 1,520   | 1,190     | 1,200  | 1,400 | 760     |
|     |     | 1.0     | T□100-250-10                                                                                                                                     | 710   | 1,520   | 1,190     | 1,200  | 1,400 | 760     |

| W   | L   | 板厚<br>t | 1枚単位                                             |         |           |             |          |         |           |
|-----|-----|---------|--------------------------------------------------|---------|-----------|-------------|----------|---------|-----------|
|     |     |         | 品番                                               | 価格(円)   |           |             |          |         |           |
|     |     |         | □:材質記号<br>鉄[F] 焼入鋼[Y] ステンレス[S] 真鍮[B] 銅[C] アルミ[A] | 鉄 T [F] | 焼入鋼 T [Y] | ステンレス T [S] | 真鍮 T [B] | 銅 T [C] | アルミ T [A] |
| 100 | 300 | 0.05    | T□100-300-005                                    | —       | —         | 780         | 790      | —       | —         |
|     |     | 0.1     | T□100-300-01                                     | 650     | 1,520     | 780         | 790      | 880     | 680       |
|     |     | 0.15    | T□100-300-015                                    | 650     | 1,520     | 780         | 790      | 880     | 680       |
|     |     | 0.2     | T□100-300-02                                     | 650     | 1,520     | 780         | 790      | 880     | 680       |
|     |     | 0.25    | T□100-300-025                                    | 650     | 1,520     | 780         | 790      | 880     | —         |
|     |     | 0.3     | T□100-300-03                                     | 650     | 1,520     | 780         | 790      | 880     | 680       |
|     |     | 0.35    | T□100-300-035                                    | —       | —         | 780         | —        | —       | —         |
|     |     | 0.4     | T□100-300-04                                     | 710     | 1,580     | 1,000       | 1,030    | 1,180   | 750       |
|     |     | 0.5     | T□100-300-05                                     | 710     | 1,580     | 1,000       | 1,030    | 1,180   | 750       |
|     |     | 0.6     | T□100-300-06                                     | 800     | 1,750     | 1,420       | 1,450    | 1,670   | 860       |
|     |     | 0.7     | T□100-300-07                                     | —       | —         | 1,420       | 1,450    | 1,670   | —         |
|     |     | 0.8     | T□100-300-08                                     | 800     | 1,750     | 1,420       | 1,450    | 1,670   | 860       |
|     |     | 1.0     | T□100-300-10                                     | 800     | 1,750     | 1,420       | 1,450    | 1,670   | 860       |
| 150 | 150 | 0.05    | T□150-150-005                                    | —       | —         | 680         | 690      | —       | —         |
|     |     | 0.1     | T□150-150-01                                     | 570     | —         | 680         | 690      | 800     | 600       |
|     |     | 0.15    | T□150-150-015                                    | 570     | —         | 680         | 690      | 800     | 600       |
|     |     | 0.2     | T□150-150-02                                     | 570     | —         | 680         | 690      | 800     | 600       |
|     |     | 0.25    | T□150-150-025                                    | 570     | —         | 680         | 690      | 800     | —         |
|     |     | 0.3     | T□150-150-03                                     | 570     | —         | 680         | 690      | 800     | 600       |
|     |     | 0.35    | T□150-150-035                                    | —       | —         | 680         | —        | —       | —         |
|     |     | 0.4     | T□150-150-04                                     | 600     | —         | 830         | 850      | 1,010   | 660       |
|     |     | 0.5     | T□150-150-05                                     | 600     | —         | 830         | 850      | 1,010   | 660       |
|     |     | 0.6     | T□150-150-06                                     | 680     | —         | 1,070       | 1,090    | 1,330   | 720       |
|     |     | 0.7     | T□150-150-07                                     | —       | —         | 1,070       | 1,090    | 1,330   | —         |
|     |     | 0.8     | T□150-150-08                                     | 680     | —         | 1,070       | 1,090    | 1,330   | 720       |
|     |     | 1.0     | T□150-150-10                                     | 680     | —         | 1,070       | 1,090    | 1,330   | 720       |
|     | 200 | 0.05    | T□150-200-005                                    | —       | —         | 780         | 790      | —       | —         |
|     |     | 0.1     | T□150-200-01                                     | 650     | —         | 780         | 790      | 880     | 680       |
|     |     | 0.15    | T□150-200-015                                    | 650     | —         | 780         | 790      | 880     | 680       |
|     |     | 0.2     | T□150-200-02                                     | 650     | —         | 780         | 790      | 880     | 680       |
|     |     | 0.25    | T□150-200-025                                    | 650     | —         | 780         | 790      | 880     | —         |
|     |     | 0.3     | T□150-200-03                                     | 650     | —         | 780         | 790      | 880     | 680       |
|     |     | 0.35    | T□150-200-035                                    | —       | —         | 780         | —        | —       | —         |
|     |     | 0.4     | T□150-200-04                                     | 710     | —         | 1,000       | 1,030    | 1,200   | 750       |
|     |     | 0.5     | T□150-200-05                                     | 710     | —         | 1,000       | 1,030    | 1,200   | 750       |
|     |     | 0.6     | T□150-200-06                                     | 800     | —         | 1,420       | 1,450    | 1,700   | 860       |
|     |     | 0.7     | T□150-200-07                                     | —       | —         | 1,420       | 1,450    | 1,700   | —         |
|     |     | 0.8     | T□150-200-08                                     | 800     | —         | 1,420       | 1,450    | 1,700   | 860       |
|     |     | 1.0     | T□150-200-10                                     | 800     | —         | 1,420       | 1,450    | 1,700   | 860       |
|     | 250 | 0.05    | T□150-250-005                                    | —       | —         | 850         | 870      | —       | —         |
|     |     | 0.1     | T□150-250-01                                     | 710     | —         | 850         | 870      | 1,010   | 730       |
|     |     | 0.15    | T□150-250-015                                    | 710     | —         | 850         | 870      | 1,010   | 730       |
|     |     | 0.2     | T□150-250-02                                     | 710     | —         | 850         | 870      | 1,010   | 730       |
|     |     | 0.25    | T□150-250-025                                    | 710     | —         | 850         | 870      | 1,010   | —         |
|     |     | 0.3     | T□150-250-03                                     | 710     | —         | 850         | 870      | 1,010   | 730       |
|     |     | 0.35    | T□150-250-035                                    | —       | —         | 850         | —        | —       | —         |
|     |     | 0.4     | T□150-250-04                                     | 780     | —         | 1,130       | 1,170    | 1,400   | 840       |
|     |     | 0.5     | T□150-250-05                                     | 780     | —         | 1,130       | 1,170    | 1,400   | 840       |
|     |     | 0.6     | T□150-250-06                                     | 880     | —         | 1,700       | 1,680    | 2,020   | 960       |
|     |     | 0.7     | T□150-250-07                                     | —       | —         | 1,700       | 1,680    | 2,020   | —         |
|     |     | 0.8     | T□150-250-08                                     | 880     | —         | 1,700       | 1,680    | 2,020   | 960       |
|     |     | 1.0     | T□150-250-10                                     | 880     | —         | 1,700       | 1,680    | 2,020   | 960       |

| W   | L   | 板厚<br>t | 1枚単位                                                                                                                                             |       |         |           |        |       |         |
|-----|-----|---------|--------------------------------------------------------------------------------------------------------------------------------------------------|-------|---------|-----------|--------|-------|---------|
|     |     |         | 品番                                                                                                                                               | 価格(円) |         |           |        |       |         |
|     |     |         | <div> <div>□ : 材質記号</div> <div> <div>鉄 F</div> <div>焼入鋼 Y</div> <div>ステンレス S</div> <div>真鍮 B</div> <div>銅 C</div> <div>アルミ A</div> </div> </div> | 鉄 T F | 焼入鋼 T Y | ステンレス T S | 真鍮 T B | 銅 T C | アルミ T A |
| 150 | 300 | 0.05    | T□150-300-005                                                                                                                                    | —     | —       | 970       | 970    | —     | —       |
|     |     | 0.1     | T□150-300-01                                                                                                                                     | 740   | —       | 970       | 970    | 1,140 | 790     |
|     |     | 0.15    | T□150-300-015                                                                                                                                    | 740   | —       | 970       | 970    | 1,140 | 790     |
|     |     | 0.2     | T□150-300-02                                                                                                                                     | 740   | —       | 970       | 970    | 1,140 | 790     |
|     |     | 0.25    | T□150-300-025                                                                                                                                    | 740   | —       | 970       | 970    | 1,140 | —       |
|     |     | 0.3     | T□150-300-03                                                                                                                                     | 740   | —       | 970       | 970    | 1,140 | 790     |
|     |     | 0.35    | T□150-300-035                                                                                                                                    | —     | —       | 970       | —      | —     | —       |
|     |     | 0.4     | T□150-300-04                                                                                                                                     | 820   | —       | 1,320     | 1,330  | 1,650 | 900     |
|     |     | 0.5     | T□150-300-05                                                                                                                                     | 820   | —       | 1,320     | 1,330  | 1,650 | 900     |
|     |     | 0.6     | T□150-300-06                                                                                                                                     | 950   | —       | 1,920     | 1,930  | 2,340 | 1,010   |
|     |     | 0.7     | T□150-300-07                                                                                                                                     | —     | —       | 1,920     | 1,930  | 2,340 | —       |
|     |     | 0.8     | T□150-300-08                                                                                                                                     | 950   | —       | 1,920     | 1,930  | 2,340 | 1,010   |
|     |     | 1.0     | T□150-300-10                                                                                                                                     | 950   | —       | 1,920     | 1,930  | 2,340 | 1,010   |
| 200 | 200 | 0.05    | T□200-200-005                                                                                                                                    | —     | —       | 900       | 900    | —     | —       |
|     |     | 0.1     | T□200-200-01                                                                                                                                     | 720   | —       | 900       | 900    | 1,070 | 760     |
|     |     | 0.15    | T□200-200-015                                                                                                                                    | 720   | —       | 900       | 900    | 1,070 | 760     |
|     |     | 0.2     | T□200-200-02                                                                                                                                     | 720   | —       | 900       | 900    | 1,070 | 760     |
|     |     | 0.25    | T□200-200-025                                                                                                                                    | 720   | —       | 900       | 900    | 1,070 | —       |
|     |     | 0.3     | T□200-200-03                                                                                                                                     | 720   | —       | 900       | 900    | 1,070 | 760     |
|     |     | 0.35    | T□200-200-035                                                                                                                                    | —     | —       | 900       | —      | —     | —       |
|     |     | 0.4     | T□200-200-04                                                                                                                                     | 800   | —       | 1,250     | 1,200  | 1,520 | 880     |
|     |     | 0.5     | T□200-200-05                                                                                                                                     | 800   | —       | 1,250     | 1,200  | 1,520 | 880     |
|     |     | 0.6     | T□200-200-06                                                                                                                                     | 900   | —       | 1,800     | 1,800  | 2,220 | 990     |
|     |     | 0.7     | T□200-200-07                                                                                                                                     | —     | —       | 1,800     | 1,800  | 2,220 | —       |
|     |     | 0.8     | T□200-200-08                                                                                                                                     | 900   | —       | 1,800     | 1,800  | 2,220 | 990     |
|     |     | 1.0     | T□200-200-10                                                                                                                                     | 900   | —       | 1,800     | 1,800  | 2,220 | 990     |
|     | 250 | 0.05    | T□200-250-005                                                                                                                                    | —     | —       | 1,020     | 1,030  | —     | —       |
|     |     | 0.1     | T□200-250-01                                                                                                                                     | 760   | —       | 1,020     | 1,030  | 1,200 | 840     |
|     |     | 0.15    | T□200-250-015                                                                                                                                    | 760   | —       | 1,020     | 1,030  | 1,200 | 840     |
|     |     | 0.2     | T□200-250-02                                                                                                                                     | 760   | —       | 1,020     | 1,030  | 1,200 | 840     |
|     |     | 0.25    | T□200-250-025                                                                                                                                    | 760   | —       | 1,020     | 1,030  | 1,200 | —       |
|     |     | 0.3     | T□200-250-03                                                                                                                                     | 760   | —       | 1,020     | 1,030  | 1,200 | 840     |
|     |     | 0.35    | T□200-250-035                                                                                                                                    | —     | —       | 1,020     | —      | —     | —       |
|     |     | 0.4     | T□200-250-04                                                                                                                                     | 850   | —       | 1,470     | 1,450  | 1,770 | 960     |
|     |     | 0.5     | T□200-250-05                                                                                                                                     | 850   | —       | 1,470     | 1,450  | 1,770 | 960     |
|     |     | 0.6     | T□200-250-06                                                                                                                                     | 990   | —       | 2,090     | 2,050  | 2,530 | 1,100   |
|     |     | 0.7     | T□200-250-07                                                                                                                                     | —     | —       | 2,090     | 2,050  | 2,530 | —       |
|     |     | 0.8     | T□200-250-08                                                                                                                                     | 990   | —       | 2,090     | 2,050  | 2,530 | 1,100   |
|     |     | 1.0     | T□200-250-10                                                                                                                                     | 990   | —       | 2,090     | 2,050  | 2,530 | 1,100   |
|     | 300 | 0.05    | T□200-300-005                                                                                                                                    | —     | —       | 1,130     | 1,150  | —     | —       |
|     |     | 0.1     | T□200-300-01                                                                                                                                     | 800   | —       | 1,130     | 1,150  | 1,400 | 930     |
|     |     | 0.15    | T□200-300-015                                                                                                                                    | 800   | —       | 1,130     | 1,150  | 1,400 | 930     |
|     |     | 0.2     | T□200-300-02                                                                                                                                     | 800   | —       | 1,130     | 1,150  | 1,400 | 930     |
|     |     | 0.25    | T□200-300-025                                                                                                                                    | 800   | —       | 1,130     | 1,150  | 1,400 | —       |
|     |     | 0.3     | T□200-300-03                                                                                                                                     | 800   | —       | 1,130     | 1,150  | 1,400 | 930     |
|     |     | 0.35    | T□200-300-035                                                                                                                                    | —     | —       | 1,130     | —      | —     | —       |
|     |     | 0.4     | T□200-300-04                                                                                                                                     | 900   | —       | 1,700     | 1,680  | 2,020 | 1,050   |
|     |     | 0.5     | T□200-300-05                                                                                                                                     | 900   | —       | 1,700     | 1,680  | 2,020 | 1,050   |
|     |     | 0.6     | T□200-300-06                                                                                                                                     | 1,070 | —       | 2,370     | 2,280  | 2,920 | 1,240   |
|     |     | 0.7     | T□200-300-07                                                                                                                                     | —     | —       | 2,370     | 2,280  | 2,920 | —       |
|     |     | 0.8     | T□200-300-08                                                                                                                                     | 1,070 | —       | 2,370     | 2,280  | 2,920 | 1,240   |
|     |     | 1.0     | T□200-300-10                                                                                                                                     | 1,070 | —       | 2,370     | 2,280  | 2,920 | 1,240   |

| W   | L   | 板厚<br>t | 1枚単位                                             |         |           |             |          |         |           |
|-----|-----|---------|--------------------------------------------------|---------|-----------|-------------|----------|---------|-----------|
|     |     |         | 品番                                               | 価格(円)   |           |             |          |         |           |
|     |     |         | □:材質記号<br>鉄[F] 焼入鋼[Y] ステンレス[S] 真鍮[B] 銅[C] アルミ[A] | 鉄 T [F] | 焼入鋼 T [Y] | ステンレス T [S] | 真鍮 T [B] | 銅 T [C] | アルミ T [A] |
| 250 | 250 | 0.05    | T□250-250-005                                    | —       | —         | 1,130       | 1,150    | —       | —         |
|     |     | 0.1     | T□250-250-01                                     | 800     | —         | 1,130       | 1,150    | 1,400   | 930       |
|     |     | 0.15    | T□250-250-015                                    | 800     | —         | 1,130       | 1,150    | 1,400   | 930       |
|     |     | 0.2     | T□250-250-02                                     | 800     | —         | 1,130       | 1,150    | 1,400   | 930       |
|     |     | 0.25    | T□250-250-025                                    | 800     | —         | 1,130       | 1,150    | 1,400   | —         |
|     |     | 0.3     | T□250-250-03                                     | 800     | —         | 1,130       | 1,150    | 1,400   | 930       |
|     |     | 0.35    | T□250-250-035                                    | —       | —         | 1,130       | —        | —       | —         |
|     |     | 0.4     | T□250-250-04                                     | 900     | —         | 1,700       | 1,680    | 2,020   | 1,060     |
|     |     | 0.5     | T□250-250-05                                     | 900     | —         | 1,700       | 1,680    | 2,020   | 1,060     |
|     |     | 0.6     | T□250-250-06                                     | 1,070   | —         | 2,370       | 2,280    | 2,920   | 1,240     |
|     |     | 0.7     | T□250-250-07                                     | —       | —         | 2,370       | 2,280    | 2,920   | —         |
|     |     | 0.8     | T□250-250-08                                     | 1,070   | —         | 2,370       | 2,280    | 2,920   | 1,240     |
|     |     | 1.0     | T□250-250-10                                     | 1,070   | —         | 2,370       | 2,280    | 2,920   | 1,240     |
|     | 300 | 0.05    | T□250-300-005                                    | —       | —         | 1,300       | 1,330    | —       | —         |
|     |     | 0.1     | T□250-300-01                                     | 900     | —         | 1,300       | 1,330    | 1,590   | 1,010     |
|     |     | 0.15    | T□250-300-015                                    | 900     | —         | 1,300       | 1,330    | 1,590   | 1,010     |
|     |     | 0.2     | T□250-300-02                                     | 900     | —         | 1,300       | 1,330    | 1,590   | 1,010     |
|     |     | 0.25    | T□250-300-025                                    | 900     | —         | 1,300       | 1,330    | 1,590   | —         |
|     |     | 0.3     | T□250-300-03                                     | 900     | —         | 1,300       | 1,330    | 1,590   | 1,010     |
|     |     | 0.35    | T□250-300-035                                    | —       | —         | 1,300       | —        | —       | —         |
|     |     | 0.4     | T□250-300-04                                     | 1,020   | —         | 1,920       | 1,930    | 2,340   | 1,180     |
|     |     | 0.5     | T□250-300-05                                     | 1,020   | —         | 1,920       | 1,930    | 2,340   | 1,180     |
|     |     | 0.6     | T□250-300-06                                     | 1,250   | —         | 2,930       | 2,880    | 3,660   | 1,400     |
|     |     | 0.7     | T□250-300-07                                     | —       | —         | 2,930       | 2,880    | 3,660   | —         |
| 300 | 300 | 0.05    | T□300-300-005                                    | —       | —         | 1,470       | 1,450    | —       | —         |
|     |     | 0.1     | T□300-300-01                                     | 970     | —         | 1,470       | 1,450    | 1,770   | 1,120     |
|     |     | 0.15    | T□300-300-015                                    | 970     | —         | 1,470       | 1,450    | 1,770   | 1,120     |
|     |     | 0.2     | T□300-300-02                                     | 970     | —         | 1,470       | 1,450    | 1,770   | 1,120     |
|     |     | 0.25    | T□300-300-025                                    | 970     | —         | 1,470       | 1,450    | 1,770   | —         |
|     |     | 0.3     | T□300-300-03                                     | 970     | —         | 1,470       | 1,450    | 1,770   | 1,120     |
|     |     | 0.35    | T□300-300-035                                    | —       | —         | 1,470       | —        | —       | —         |
|     |     | 0.4     | T□300-300-04                                     | 1,070   | —         | 2,140       | 2,170    | 2,660   | 1,290     |
|     |     | 0.5     | T□300-300-05                                     | 1,070   | —         | 2,140       | 2,170    | 2,660   | 1,290     |
|     |     | 0.6     | T□300-300-06                                     | 1,350   | —         | 3,380       | 3,360    | 4,420   | 1,570     |
|     |     | 0.7     | T□300-300-07                                     | —       | —         | 3,380       | 3,360    | 4,420   | —         |
|     |     | 0.8     | T□300-300-08                                     | 1,350   | —         | 3,380       | 3,360    | 4,420   | 1,570     |
|     |     | 1.0     | T□300-300-10                                     | 1,350   | —         | 3,380       | 3,360    | 4,420   | 1,570     |
|     | 300 | 0.05    | T□300-300-005                                    | —       | —         | 1,470       | 1,450    | —       | —         |
|     |     | 0.1     | T□300-300-01                                     | 970     | —         | 1,470       | 1,450    | 1,770   | 1,120     |
|     |     | 0.15    | T□300-300-015                                    | 970     | —         | 1,470       | 1,450    | 1,770   | 1,120     |
|     |     | 0.2     | T□300-300-02                                     | 970     | —         | 1,470       | 1,450    | 1,770   | 1,120     |
|     |     | 0.25    | T□300-300-025                                    | 970     | —         | 1,470       | 1,450    | 1,770   | —         |
|     |     | 0.3     | T□300-300-03                                     | 970     | —         | 1,470       | 1,450    | 1,770   | 1,120     |
|     |     | 0.35    | T□300-300-035                                    | —       | —         | 1,470       | —        | —       | —         |
|     |     | 0.4     | T□300-300-04                                     | 1,070   | —         | 2,140       | 2,170    | 2,660   | 1,290     |
|     |     | 0.5     | T□300-300-05                                     | 1,070   | —         | 2,140       | 2,170    | 2,660   | 1,290     |
|     |     | 0.6     | T□300-300-06                                     | 1,350   | —         | 3,380       | 3,360    | 4,420   | 1,570     |
|     |     | 0.7     | T□300-300-07                                     | —       | —         | 3,380       | 3,360    | 4,420   | —         |

| セミオーダー | オプション           |               |                    |
|--------|-----------------|---------------|--------------------|
| ▶P.210 | マーキング<br>▶P.219 | 黒染め<br>▶P.220 | 仮止め用粘着剤付<br>▶P.220 |